

# PEAD-RP Power Inverter Heat Pump

## Ceiling Concealed Ducted System

- Reduced height - entire range now only 250mm
- Wider range of external static pressure settings across entire range
- Reduced noise levels thanks to the use of a newly designed centrifugal fan - as low as 23dBA
- Drain pump included as standard




### Technical Information

PEAD-RP - INDOOR UNITS								
MODEL REFERENCE		PEAD-RP35JA	PEAD-RP50JA	PEAD-RP60JA	PEAD-RP71JA	PEAD-RP100JA	PEAD-RP125JA	PEAD-RP140JA
CAPACITY (kW)	Heating (nominal)	4.1 (1.6-5.2)	6.0 (2.5-7.3)	7.0 (2.8-8.2)	8.0 (3.5-10.2)	11.2 (4.5-14.0)	14.0 (5.0-16.0)	16.0 (5.7-18.0)
	Cooling (nominal)	3.6 (1.6-4.5)	5.0 (2.3-5.6)	6.0 (2.7-6.7)	7.1 (3.3-8.1)	10.0 (4.9-11.4)	12.5 (5.5-14.0)	14.0 (6.2-15.3)
	Heating (UK)	3.5 (1.35-4.4)	5.1 (2.15-6.2)	5.95 (2.4-6.95)	6.8 (3.0-8.65)	9.5 (3.85-11.9)	11.9 (4.25-13.6)	13.6 (4.85-15.3)
	Cooling (UK)	3.3 (1.45-4.15)	4.6 (2.1-5.15)	5.5 (2.5-6.15)	6.55 (3.05-7.45)	9.2 (4.5-10.5)	11.5 (5.05-12.9)	12.9 (5.7-14.1)
SHF (nominal)		0.85	0.84	0.83	0.83	0.82	0.84	0.83
COP / EER (nominal)		3.73 / 3.53	3.85 / 3.23	4.00 / 3.75	4.00 / 3.50	4.12 / 3.61	4.00 / 3.24	3.96 / 3.21
ENERGY LABEL	Heating/Cooling	A / A	A / A	A / A	A / A	A / A	A / A	A / A
AIRFLOW (m <sup>3</sup> /min)	Lo-Mi-Hi	10-12-14	12-14.5-17	14.5-18-21	17.5-21-25	24-29-34	29.5-33.5-42	32-39-46
PIPE SIZE mm(in)	Gas	12.7 (1/2")	12.7 (1/2")	15.88 (5/8")	15.88 (5/8")	15.88 (5/8")	15.88 (5/8")	15.88 (5/8")
	Liquid	6.35 (1/4")	6.35 (1/4")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")
EXTERNAL STATIC PRESSURE (Pa) Lo-Mi-Mi2-Mi3-Hi		35-50-70-100-150	35-50-70-100-150	35-50-70-100-150	35-50-70-100-150	35-50-70-100-150	35-50-70-100-150	35-50-70-100-150
NOISE (dBA) (50Pa)	Lo-Mi-Hi	23-27-30	26-31-35	25-29-33	26-30-34	29-34-38	33-36-40	34-38-43
DIMENSIONS (mm)	Width	900	900	1100	1100	1400	1400	1600
	Depth	732	732	732	732	732	732	732
	Height	250	250	250	250	250	250	250
WEIGHT (kg)		26	28	33	33	41	43	47
ELECTRICAL SUPPLY		Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit
PHASE		Single	Single	Single	Single	Single	Single	Single
FUSE RATING (BS88) - HRC (A)		6	6	6	6	6	6	6
INTERCONNECTING CABLE No. CORES		4	4	4	4	4	4	4


PUHZ-RP - OUTDOOR UNITS								
MODEL REFERENCE		PUHZ-RP35VHA4	PUHZ-RP50VHA4	PUHZ-RP60VHA4	PUHZ-RP71VHA4	PUHZ-RP100VKA/YKA	PUHZ-RP125VKA/YKA	PUHZ-RP140VKA/YKA
NOISE (dBA)	Heating/Cooling (silent)	46 / 44 (41)	46 / 44 (41)	48 / 47 (44)	48 / 47 (44)	51 / 49 (46)	52 / 50 (47)	52 / 50 (47)
WEIGHT (kg)		42	42	67	67	116 / 124	116 / 126	118 / 132
DIMENSIONS (mm)	Width	800	800	950	950	1050	1050	1050
	Depth	300 + 23	300 + 23	330 + 30	330 + 30	330 + 30	330 + 30	330 + 30
	Height	600	600	943	943	1338	1338	1338
ELECTRICAL SUPPLY		220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz / 380-415,50Hz	220-240v, 50Hz / 380-415,50Hz	220-240v, 50Hz / 380-415,50Hz
PHASE		Single	Single	Single	Single	Single / 3	Single / 3	Single / 3
SYSTEM POWER INPUT (kW)	Heating/Cooling (nominal)	1.10 / 1.02	1.56 / 1.55	1.75 / 1.60	2.00 / 2.03	2.72 / 2.77	3.50 / 3.86	4.04 / 4.36
	Heating/Cooling (UK)	0.98 / 0.87	1.39 / 1.32	1.56 / 1.36	1.78 / 1.73	2.42 / 2.35	3.12 / 3.28	3.60 / 3.71
STARTING CURRENT (A)		5	5	5	5	5	5	5
SYSTEM RUNNING CURRENT (A) Single Phase		5.15 / 4.81 [14.1]	7.38 / 7.35 [14.4]	8.29 / 7.63 [20.6]	9.46 / 9.62 [21]	12.73 / 12.98 [29.2]	16.45 / 18.09 [29.3]	18.94 / 20.39 [30.8]
Heating/Cooling [MAX] 3 Phase		-	-	-	-	5.48 / 5.63 [10.7]	7.25 / 7.89 [12.3]	8.25 / 8.83 [13.8]
FUSE RATING (BS88) - HRC (A)		16	16	25	25	32 / 16	32 / 16	32 / 16
MAINS CABLE No. Cores		3	3	3	3	3 / 5	3 / 5	3 / 5
MAX PIPE LENGTH (m)		50	50	50	50	75	75	75
MAX HEIGHT DIFFERENCE (m)		30	30	30	30	30	30	30
CHARGE R410A (kg) - 30m		2.5	2.5	3.5	3.5	5.0	5.0	5.0

# INDOOR UNIT PEAD-RP35-140JA


Front View >

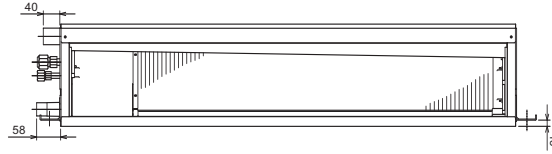


Upper View >

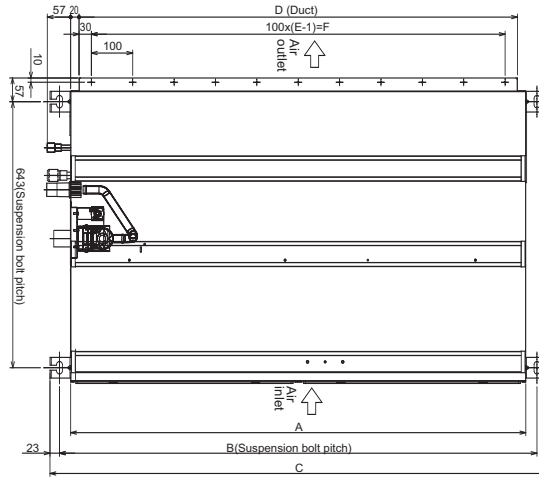

Rear View >

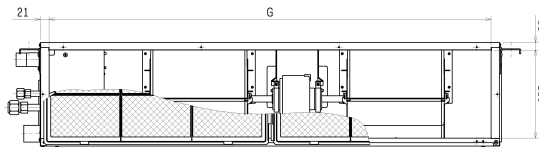

Side View >

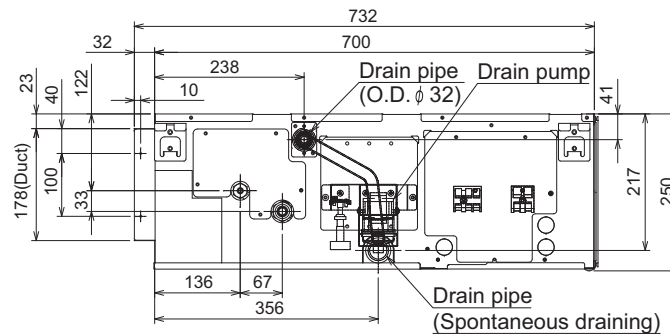


Model	A	B	C	D	E	F	G
PEAD-RP35-50JA	900	954	1000	860	9	800	858
PEAD-RP60-71JA	1100	1154	1200	1060	11	1000	1058
PEAD-RP100-125JA	1400	1454	1500	1360	14	1300	1358
PEAD-RP140JA	1600	1654	1700	1560	16	1500	1558

# PEAD-RP Standard Inverter Heat Pump

## Ceiling Concealed Ducted System

The Standard Inverter range provides inverter solutions for customers who want all the benefits that inverters offer, but do not have the budget available for the more expensive Power Inverter range.

- Reduced height - entire range now only 250mm
- Wider range of external static pressure settings across entire range
- Reduced noise levels thanks to the use of a newly designed centrifugal fan - as low as 23dBA
- Drain pump included as standard
- 3-phase Standard Inverter available late 2009

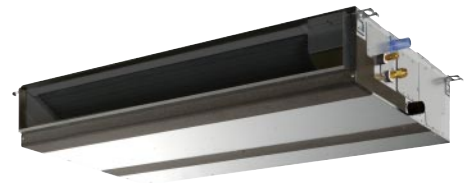

### Technical Information


PEAD-RP - INDOOR UNITS								
MODEL REFERENCE		PEAD-RP35JA	PEAD-RP50JA	PEAD-RP60JA	PEAD-RP71JA	PEAD-RP100JA	PEAD-RP125JA	PEAD-RP140JA
CAPACITY (kW)	Heating (nominal)	4.1 (0.9-5.0)	5.9 (0.9-7.2)	7.0 (0.9-8.0)	8.0 (0.9-10.2)	11.2 (4.5-12.5)	14.0 (5.0-16.0)	16.0 (5.0-18.0)
	Cooling (nominal)	3.6 (1.0-3.9)	4.9 (1.1-5.6)	5.7 (1.1-6.3)	7.1 (0.9-8.1)	9.4 (4.9-11.2)	12.3 (5.5-14.0)	13.6 (5.5-15.0)
	Heating (UK)	3.4 (0.75-4.15)	4.9 (0.75-6.0)	5.8 (0.75-6.65)	6.65 (0.75-8.5)	9.5 (3.85-10.65)	11.9 (4.25-13.6)	13.6 (4.25-15.3)
	Cooling (UK)	3.55 (1.0-3.85)	4.85 (1.1-5.55)	5.65 (1.1-6.25)	7.05 (0.9-8.05)	8.65 (4.5-10.3)	11.3 (5.05-12.9)	12.5 (5.05-13.8)
SHF (nominal)		0.85	0.85	0.86	0.83	0.85	0.85	0.84
COP / EER (nominal)		3.69 / 3.40	3.64 / 3.22	3.61 / 3.39	3.83 / 3.21	3.41 / 3.01	3.41 / 2.81	3.21 / 2.61
ENERGY LABEL	Heating/Cooling	A / A	A / A	A / A	A / A	B / B	B / C	C / D
AIRFLOW (m³/min)	Lo-Mi-Hi	10-12-14	12-14.5-17	14.5-18-21	17.5-21-25	24-29-34	29.5-35.5-42	32-39-46
PIPE SIZE mm(in)	Gas	9.52 (3/8")	12.7 (1/2")	15.88 (5/8")	15.88 (5/8")	15.88 (5/8")	15.88 (5/8")	15.88 (5/8")
	Liquid	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")
EXTERNAL STATIC PRESSURE (Pa) Lo-Mi1-Mi2-Mi3-Hi		35-50-70-100-150	35-50-70-100-150	35-50-70-100-150	35-50-70-100-150	35-50-70-100-150	35-50-70-100-150	35-50-70-100-150
NOISE (dBA) (50Pa)	Lo-Mi-Hi	23-27-30	26-31-35	25-29-33	26-30-34	29-34-38	33-36-40	34-38-43
DIMENSIONS (mm)	Width	900	900	1100	1100	1400	1400	1600
	Depth	732	732	732	732	732	732	732
	Height	250	250	250	250	250	250	250
WEIGHT (kg)		26	28	33	33	41	43	47
ELECTRICAL SUPPLY		Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit
PHASE		Single	Single	Single	Single	Single	Single	Single
FUSE RATING (BS88) - HRC (A)		6	6	6	6	6	6	6
INTERCONNECTING CABLE No. CORES		4	4	4	4	4	4	4

SUZ-KA / PUHZ-P - OUTDOOR UNITS								
MODEL REFERENCE		SUZ-KA35VA	SUZ-KA50VA	SUZ-KA60VA	SUZ-KA71VA	PUHZ-P100VHA3	PUHZ-P125VHA3	PUHZ-P140VHA3
NOISE (dBA)	Heating/Cooling (silent)	48 / 47	55 / 53	55 / 53	55 / 53	54 / 50 (47)	55 / 51 (48)	56 / 52 (49)
WEIGHT (kg)		37	53	53	58	75	99	99
DIMENSIONS (mm)	Width	800	840	840	840	950	950	950
	Depth	285	330	330	330	330 + 30	330 + 30	330 + 30
	Height	550	850	850	850	943	1350	1350
ELECTRICAL SUPPLY		220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz
PHASE		Single	Single	Single	Single	Single	Single	Single
SYSTEM POWER INPUT (kW)	Heating/Cooling (nominal)	1.11 / 1.06	1.62 / 1.52	1.94 / 1.68	2.09 / 2.21	3.28 / 3.12	4.11 / 4.38	4.98 / 5.21
	Heating/Cooling (UK)	1.01 / 0.85	1.47 / 1.22	1.77 / 1.34	1.90 / 1.77	2.92 / 2.65	3.66 / 3.72	4.43 / 4.43
STARTING CURRENT (A)		4.75	6.75	9.75	10.3	4	14	14
SYSTEM RUNNING CURRENT (A) [MAX] Heating/Cooling		5.24 / 5.01 [10.3]	7.34 / 6.88 [17.4]	8.52 / 7.37 [17.6]	9.18 / 9.71 [18]	16.18 / 15.38 [30.7]	19.49 / 20.59 [30.8]	23.23 / 24.38 [32.3]
FUSE RATING (BS88) - HRC (A)		16	20	20	20	32	32	40
MAINS CABLE No. Cores		3	3	3	3	3	3	3
MAX PIPE LENGTH (m)		20	30	30	30	50	50	50
MAX HEIGHT DIFFERENCE (m)		12	30	30	30	30	30	30
CHARGE R410A (kg)		1.05	1.6	1.8	2.0	2.7	4.5	4.5


Notes: All units charged to 7m (35-71), 20m (100) and 30m (125-140) pipe length.

# INDOOR UNIT PEAD-RP35-140JA


Front View >

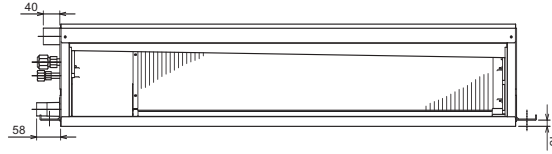


Upper View >

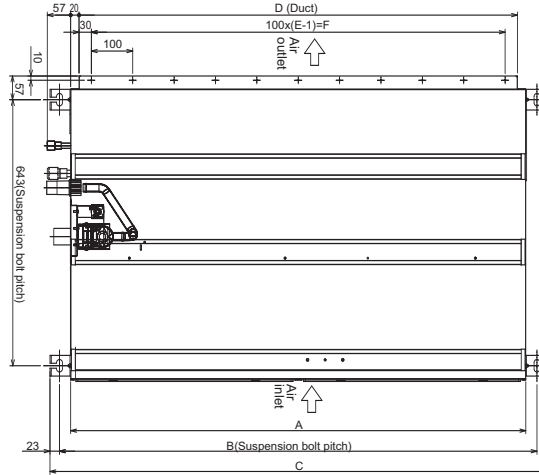

Rear View >

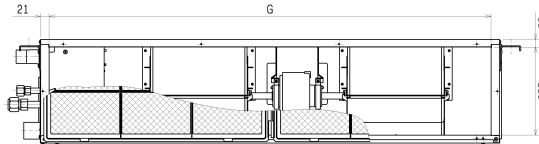

Side View >

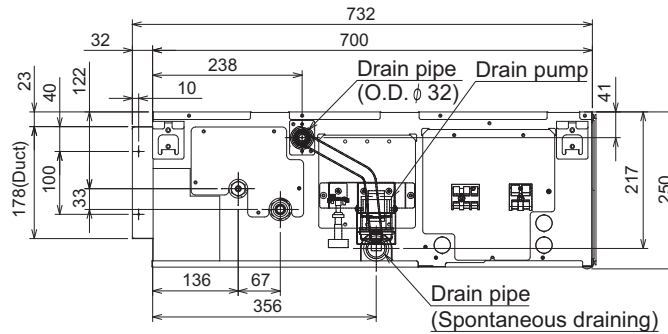

Model	A	B	C	D	E	F	G
PEAD-RP35-50JA	900	954	1000	860	9	800	858
PEAD-RP60-71JA	1100	1154	1200	1060	11	1000	1058
PEAD-RP100-125JA	1400	1454	1500	1360	14	1300	1358
PEAD-RP140JA	1600	1654	1700	1560	16	1500	1558

# PEAD-RP Zubadan Inverter Heat Pump

## Ceiling Concealed Ducted System

### Zubadan sets a new standard in performance

The new Mr Slim Zubadan Inverter heat pumps achieve an excellent heating performance even when the outdoor air temperature is as low as -25°C.

- Stable Heating Performance - Full heating capacity at -15°C - a 30% capacity improvement over the next size up Power Inverter
- Expanded Heating Operation - Will work effectively even when the outdoor ambient air temperature is -25°C
- Stable Operation - Utilising the new Flash Injection Circuit the Zubadan models have reduced defrost times and can provide continuous heating for up to 150 mins
- Quick Start-Up - At -20°C, full heating capacity is achieved in about 20 mins, improving comfort levels



### Technical Information

#### PEAD-RP - INDOOR UNITS


MODEL REFERENCE		PEAD-RP71JA	PEAD-RP100JA	PEAD-RP125JA
CAPACITY (kW)	Heating (nominal)	8.0 (3.5-10.2)	11.2 (4.5-14.0)	14.0 (5.0-16.0)
	Cooling (nominal)	7.1 (3.3-8.1)	10.0 (4.9-11.4)	12.5 (5.5-14.0)
	Heating (UK)	6.8 (3.0-8.65)	9.5 (3.85-11.9)	11.9 (4.25-13.6)
	Cooling (UK)	6.55 (3.05-7.45)	9.2 (4.5-10.5)	11.5 (5.05-12.9)
SHF (nominal)		0.83	0.82	0.84
COP / EER (nominal)		3.42 / 3.30	3.61 / 3.27	3.61 / 3.21
ENERGY LABEL	Heating/Cooling	B / A	A / A	A / A
AIRFLOW (m <sup>3</sup> /min)	Lo-Mi-Hi	17.5-21-25	24-29-34	29.5-33.5-42
PIPE SIZE mm(in)	Gas	15.88 (5/8")	15.88 (5/8")	15.88 (5/8")
	Liquid	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")
EXTERNAL STATIC PRESSURE (Pa) Lo-Mi1-Mi2-Mi3-Hi		35-50-70-100-150	35-50-70-100-150	35-50-70-100-150
NOISE (dBA) (50Pa)	Lo-Mi-Hi	26-30-34	29-34-38	33-36-40
DIMENSIONS (mm)	Width	1100	1400	1400
	Depth	732	732	732
	Height	250	250	250
WEIGHT (kg)		33	41	43
ELECTRICAL SUPPLY		Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit
PHASE		Single	Single	Single
FUSE RATING (BS88) - HRC (A)		6	6	6
INTERCONNECTING CABLE No. CORES		4	4	4

#### PUHZ-HRP - OUTDOOR UNITS


MODEL REFERENCE		PUHZ-HRP71VHA2	PUHZ-HRP100VHA2/YHA2	PUHZ-HRP125YHA2
NOISE (dBA)	Heating/Cooling (silent)	52 / 51 (48)	52 / 51 (48)	52 / 51 (48)
WEIGHT (kg)		120	120 / 134	134
DIMENSIONS (mm)	Width	950	950	950
	Depth	330 + 30	330 + 30	330 + 30
	Height	1350	1350	1350
ELECTRICAL SUPPLY		220-240v, 50Hz	220-240v, 50Hz / 380-415,50Hz	380-415,50Hz
PHASE		Single	Single / 3	3
SYSTEM POWER INPUT (kW)	Heating/Cooling (nominal)	2.34 / 2.15	3.10 / 3.06	3.88 / 3.89
	Heating/Cooling (UK)	2.08 / 1.83	2.76 / 2.60	3.45 / 3.31
STARTING CURRENT (A)		14	14 / 3	3
SYSTEM RUNNING CURRENT (A) Single Phase		10.99 / 10.15 [31.5]	14.43 / 14.28 [37.7]	-
Heating/Cooling [MAX] 3 Phase		-	6.07 / 6.09 [15.7]	7.84 / 7.94 [15.8]
FUSE RATING (BS88) - HRC (A)		32	40 / 16	16
MAINS CABLE No. Cores		3	3 / 5	5
MAX PIPE LENGTH (m)		75	75	75
MAX HEIGHT DIFFERENCE (m)		30	30	30
CHARGE R410A (kg) - 30m		5.5	5.5	5.5

# INDOOR UNIT PEAD-RP71-125JA


Front View >

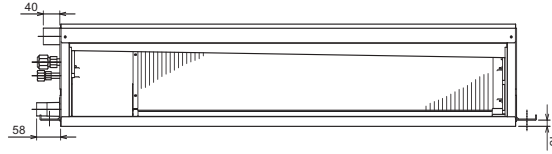


Upper View >

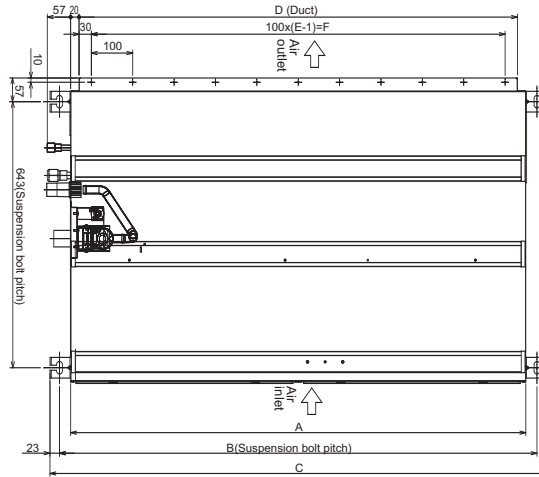

Rear View >

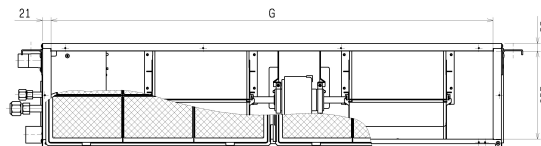

Side View >

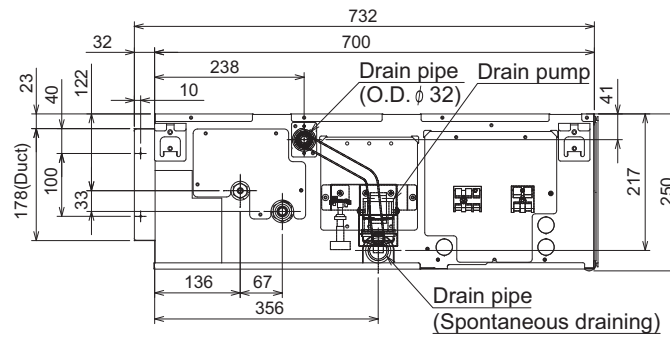

Model	A	B	C	D	E	F	G
PEAD-RP71JA	1100	1154	1200	1060	11	1000	1058
PEAD-RP100-125JA	1400	1454	1500	1360	14	1300	1358