

# PFFY-P-VKM-E

## Floor Standing Exposed Indoor Unit

The PFFY-P-VKM-E series is extremely versatile and is designed for wall attached installation at floor level. The auto swing vane provides a more natural and comfortable airflow throughout the room and the lightweight, compact design makes installation easy.

- Pure white, slimline design
- Upper and lower vanes for optimum, powerful and efficient air distribution




### Technical Information

#### PFFY-P-VKM-E - INDOOR UNIT


MODEL REFERENCE		PFFY-P20VKM-E	PFFY-P25VKM-E	PFFY-P32VKM-E	PFFY-P40VKM-E
CAPACITY (kW)	Heating (nominal)	2.5	3.2	4.0	5.0
	Cooling (nominal)	2.2	2.8	3.6	4.5
	Heating (UK)	2.3	3.0	3.7	4.6
	Cooling (UK)	2.1	2.6	3.4	4.3
	High Sensible	Cooling (UK)	1.6	2.0	2.6
SHF	(UK)	0.81	0.77	0.71	0.70
High Sensible	(UK)	0.88	0.85	0.77	0.76
POWER INPUT (kW)	Heating (nominal)	0.025	0.025	0.025	0.028
	Cooling (nominal)	0.025	0.025	0.025	0.028
AIRFLOW (m3/min)	Lo-Mi1-Mi2-Hi	5.9-6.8-7.6-8.7	6.1-7.0-8.0-9.1	6.1-7.0-8.0-9.1	8.0-9.0-9.5-10.7
NOISE (dBA)	Lo-Mi1-Mi2-Hi	27-31-34-37	28-32-35-38	28-32-35-38	35-38-42-44
WEIGHT (kg)		15	15	15	15
DIMENSIONS (mm)	Width	700	700	700	700
	Depth	200	200	200	200
	Height	600	600	600	600
ELECTRICAL SUPPLY		220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz
PHASE		Single	Single	Single	Single
RUNNING CURRENT (A)	Heating	0.20	0.20	0.20	0.24
	Cooling	0.20	0.20	0.20	0.24
FUSE RATING (BS88) - HRC (A)		6	6	6	6
MAINS CABLE No. Cores		3	3	3	3

# PFFY-P20,25,32,40VKM-E

Upper View >

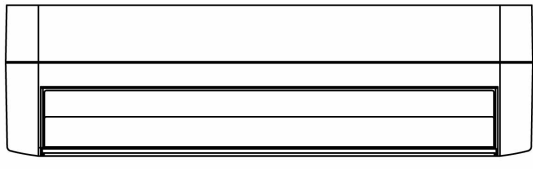

Front View >

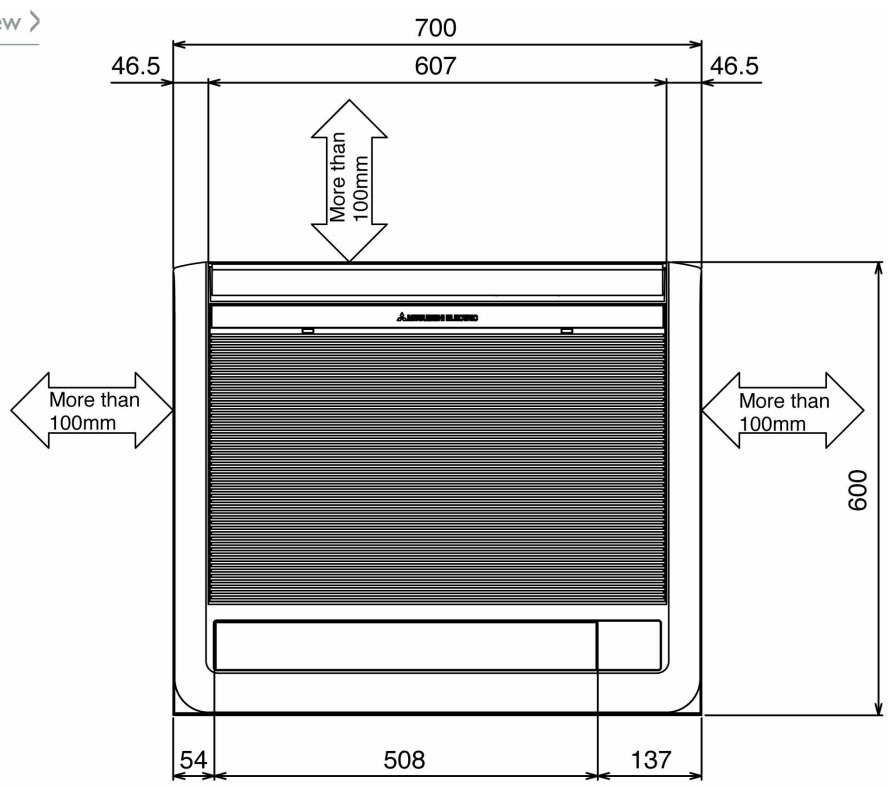

Side View >

